



TM-SMM2W

DC-18 GHz

DC-18 GHz SMA Male 2 Watt Termination

PRODUCT SPECIFICATIONS

KEY FEATURES

Polarity	Standard
Interface	SMA
Connector Gender	Male
Impedance	50 Ω
Input Power max. (Watts)	2


PERFORMANCE FEATURES

Frequency Range	DC-18 GHz
VSWR	1.20:1 typ.
Connector Rating	500 Cycles
Operating Temperature	-55°C to +100°C

MATERIAL FEATURES

Body Material	Passivated Stainless Steel
Body Plating	Passivated Stainless Steel
Center Contact	Beryllium Copper

OUTLINE DRAWING

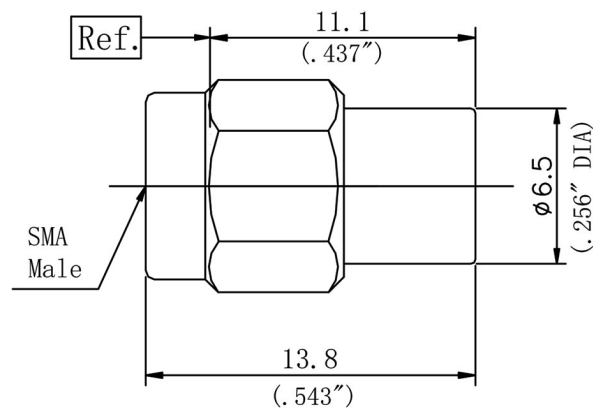

Scan here for Vista-RF.com

Vista RF, Inc.
Rocklin, CA 95677
sales@vista-rf.com
www.vista-rf.com