



BT-0130-1

10-3000 MHz

10-3000 MHz SMA Female Bias Tee

PRODUCT SPECIFICATIONS

PERFORMANCE FEATURES

Frequency Range	10-3000 MHz
VSWR, typ.	1.50:1
Impedance, typ.	50 Ω
Isolation, typ.	25 dB
Insertion Loss, typ	1.8 dB
Power Handling, max.	10 Watts
Voltage, typ.	50 VDC
Current, typ.	3000 mA

MATERIAL FEATURES

Body Material	Passivated Stainless Steel
Body Plating	Passivated Stainless Steel
Contacts	Beryllium Copper
Connector Rating	500 Cycles
Operating Temp	-55°C to +100°C


FEATURES

Low Insertion Loss
Non-Resonant
Compact Size

APPLICATIONS

Amplifier
Modulator

OUTLINE DRAWING

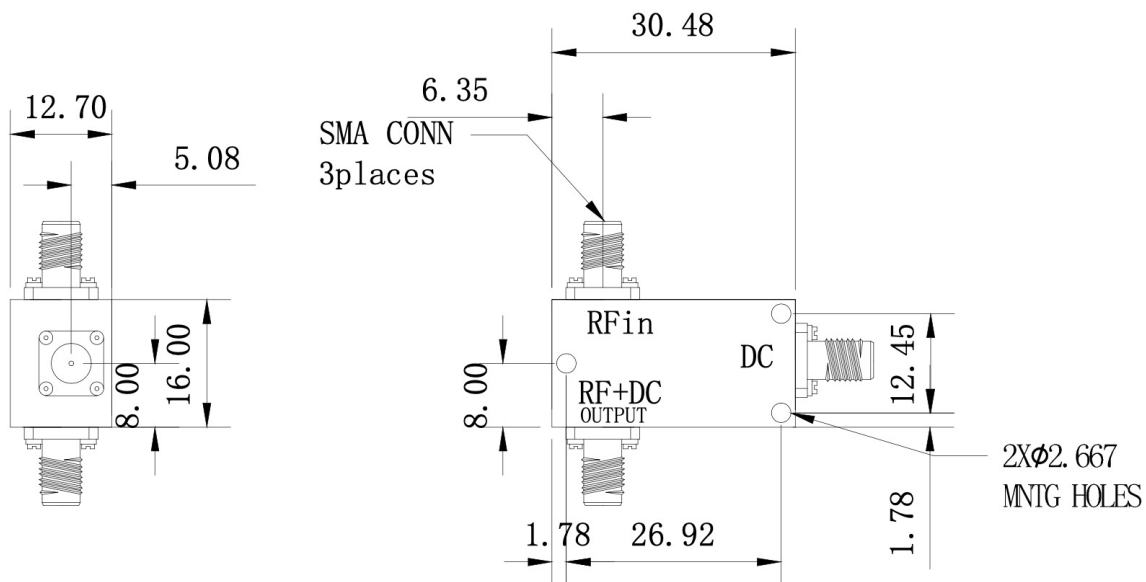

Vista RF, Inc.

sales@vista-rf.com
www.vista-rf.com