

BT-03270-S

30 KHz-27 GHz

30 KHz-27 GHz SMA Female Bias Tee

PRODUCT SPECIFICATIONS

PERFORMANCE FEATURES

Frequency Range	30 KHz-27 GHz
VSWR, typ.	1.80:1
Impedance, typ.	50 Ω
Isolation, typ.	40 dB
Insertion Loss, typ	2.2 dB
Power Handling, max.	1 Watt
Voltage, typ.	25 VDC
Current, typ.	500 mA

MATERIAL FEATURES

Body Material	Passivated Stainless Steel
Body Plating	Passivated Stainless Steel
Contacts	Beryllium Copper
Connector Rating	500 Cycles
Operating Temp	-55°C to +100°C


FEATURES

Low Insertion Loss
Non-Resonant
Compact Size

APPLICATIONS

Amplifier
Modulator

OUTLINE DRAWING

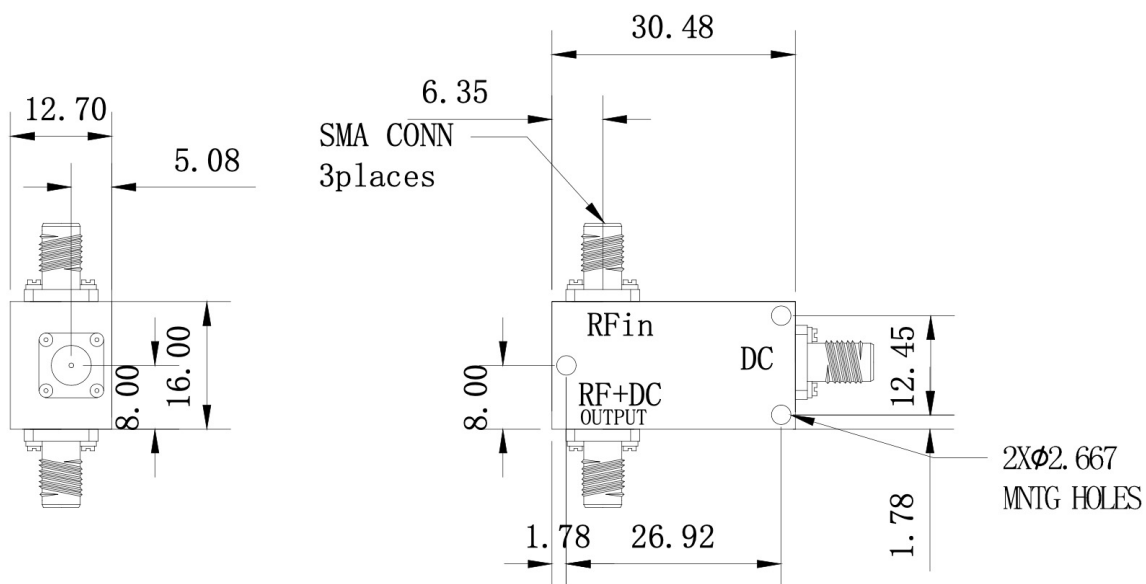

Vista RF, Inc.

sales@vista-rf.com
www.vista-rf.com