

# BT-03850-18

30 KHz-85 GHz

30 KHz-85 GHz 1.85mm Female Bias Tee

## PRODUCT SPECIFICATIONS

### PERFORMANCE FEATURES

Frequency Range	30 KHz-85 GHz
VSWR, typ.	1.80:1
Impedance, typ.	50 Ω
Isolation, typ.	30 dB
Insertion Loss, typ	4.0 dB
Power Handling, max.	1 Watt
Voltage, typ.	25 VDC
Current, typ.	500 mA

### MATERIAL FEATURES

Body Material	Passivated Stainless Steel
Body Plating	Passivated Stainless Steel
Contacts	Beryllium Copper
Connector Rating	500 Cycles
Operating Temp	-55°C to +100°C


### FEATURES

Low Insertion Loss
Non-Resonant
Compact Size

### APPLICATIONS

Amplifier
Modulator

## OUTLINE DRAWING

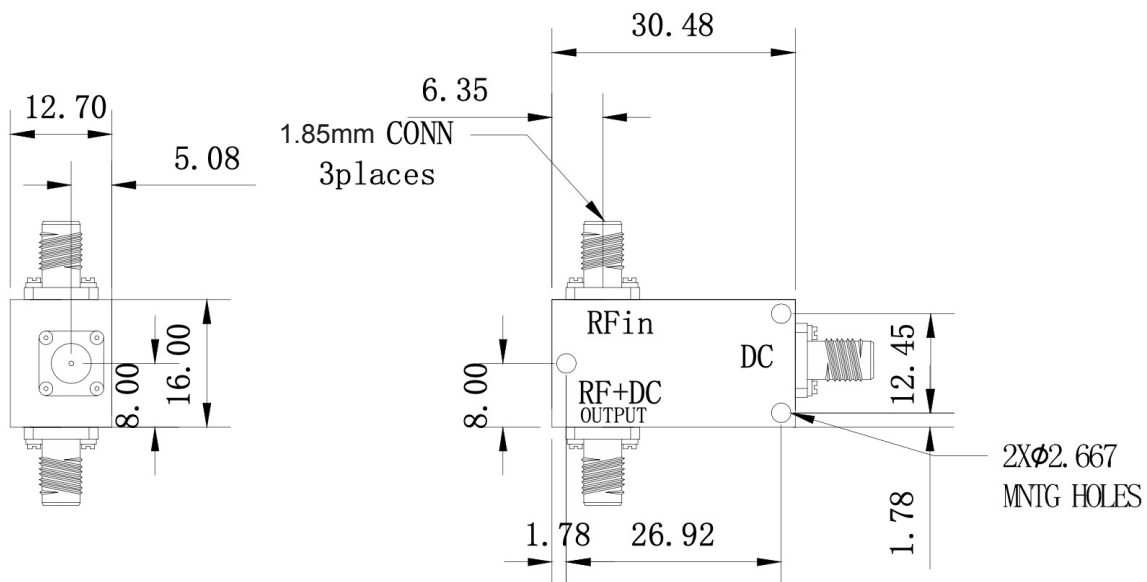

Vista RF, Inc.

sales@vista-rf.com  
www.vista-rf.com