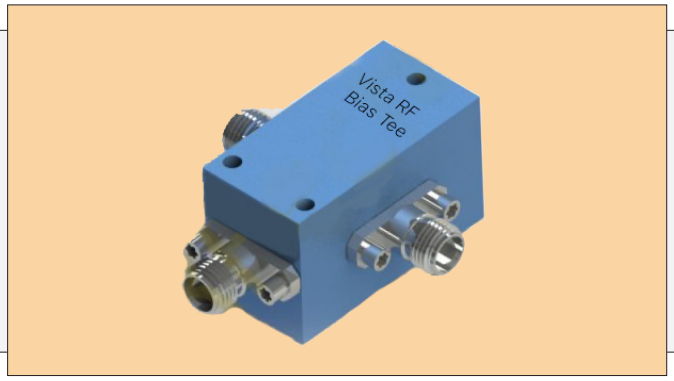

BT-1124-S

100 KHz-12.4 GHz

100 KHz-12.4 GHz SMA Female Bias Tee

PRODUCT SPECIFICATIONS

PERFORMANCE FEATURES

Frequency Range	100 KHz-12.4 GHz
VSWR, typ.	1.60:1
Impedance, typ.	50 Ω
Isolation, typ.	35 dB
Insertion Loss, typ	1.5 dB
Power Handling, max.	1 Watt
Voltage, typ.	50 VDC
Current, typ.	700 mA

MATERIAL FEATURES

Body Material	Passivated Stainless Steel
Body Plating	Passivated Stainless Steel
Contacts	Beryllium Copper
Connector Rating	500 Cycles
Operating Temp	-55°C to +100°C

FEATURES	APPLICATIONS
Low Insertion Loss	Amplifier
Non-Resonant	Modulator
Compact Size	

OUTLINE DRAWING

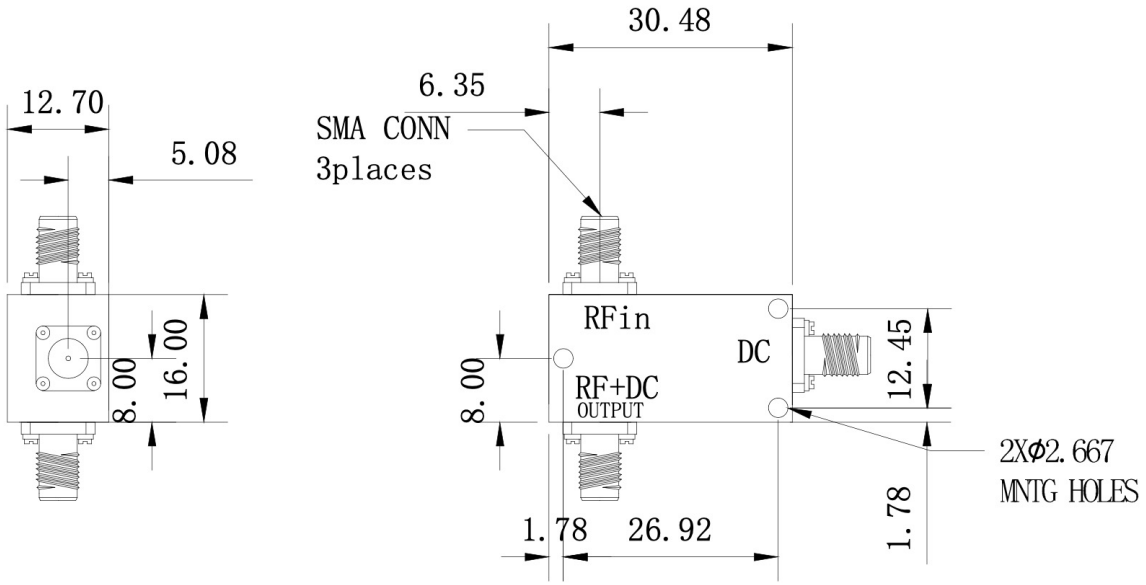

Scan here for Vista-RF.com

Prices and specifications subject to change without notice

Vista RF, Inc.

sales@vista-rf.com
www.vista-rf.com