



BT-48-1

425-800 MHz

425-800 MHz SMA Female Bias Tee

PRODUCT SPECIFICATIONS

PERFORMANCE FEATURES

Frequency Range	425-800 MHz
VSWR, typ.	1.50:1
Impedance, typ.	50 Ω
Isolation, typ.	25 dB
Insertion Loss, typ	0.6 dB
Power Handling, max.	15 Watts
Voltage, typ.	100 VDC
Current, typ.	8000 mA

MATERIAL FEATURES

Body Material	Passivated Stainless Steel
Body Plating	Passivated Stainless Steel
Contacts	Beryllium Copper
Connector Rating	500 Cycles
Operating Temp	-55°C to +100°C

FEATURES

Low Insertion Loss


Non-Resonant

Compact Size

APPLICATIONS

Amplifier Modulator

OUTLINE DRAWING

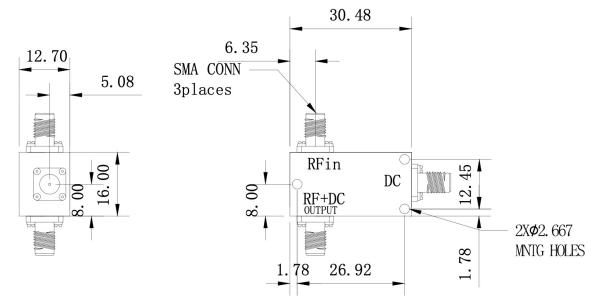



Vista RF, Inc.