



NO IMAGE  
AVAILABLE

# AD-185M185M-RA

DC-67 GHz

1.85mm Male to 1.85mm Male Right Angle Adapter

## PRODUCT SPECIFICATIONS

### KEY FEATURES

Polarity	Standard
Interface	1.85mm - 1.85mm
Connector Gender	Male to Male
Impedance	50 $\Omega$
Body Style	Right Angle


### PERFORMANCE FEATURES

Frequency Range	DC-67 GHz
VSWR	1.40:1
Insertion Loss	0.40dB
Connector Rating	500 Cycles
Operating Temperature	-55°C to +100°C

### MATERIAL FEATURES

Body Material	Passivated Stainless Steel
Body Plating	Passivated Stainless Steel
Center Contact	Beryllium Copper
Insulator	PEI

## OUTLINE DRAWING

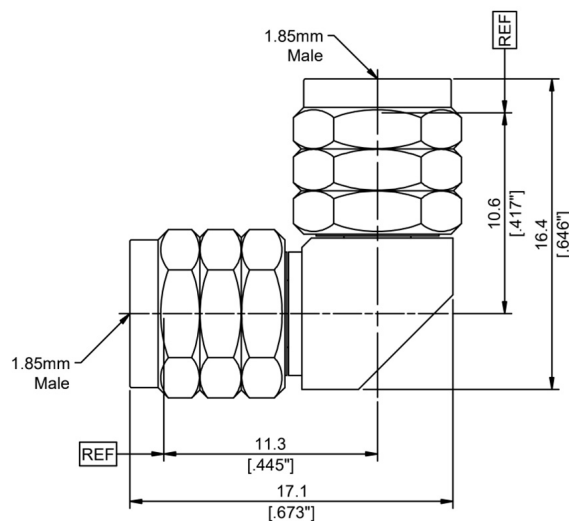

Scan here for Vista-RF.com

Vista RF, Inc.  
Rocklin, CA 95677  
(916) 848-4868  
www.vista-rf.com